



MULTI-INSTALLATIONS

Manufacturers & Installers of High Security Doors & Locks • Kitchens & Bathroom Refurbishment

STEEL FACED TIMBER DOORS FOR THE LOCATION OF REFUSE CHUTE, ROOF, BINSTORE, ELECTRIC CUPBOARD & LIFT MOTOR ROOM WITH LOUVRES

Features:

- 44mm thick tri-laminate door blank laminated with 0.9mm steel sheets both sides
- Door edges to be capped with stainless steel channels on all sides
- All steel on door and frame to be powder coated
- Full length gap guard protection to lock
- Custom designs on request

Specification:

Sizes:

- Any size made to order (however max. size of door leaf will be 1.2m (w) x 2.4m (h))

Ironmongery:

- 12mm stainless steel continuous hinge onto hardwood frame or stainless steel frame
- Stainless steel pull handle 225x22mm or stainless steel long pull handle
- Stainless steel push plate
- Barrel Bolts - on passive door (where double door)

Alternative Frames:

- 80x40x2mm stainless steel hollow section
- 100x50x2mm stainless steel hollow section
- 70x95mm rebated hardwood frame

Hardware:

- Surface mounted door closer
- 2mm Stainless steel full height gap guard
- Metal louvre, Mesh
- Weatherboard (where door is exposed to rain)

Options:


- Upgrade from surface mounted door closer to an LCN2035 concealed door closer
- RX100 low level threshold (if required)
- Fanlights (Solid Panel, Mesh or Louvred)

Locking Options:

- Mul-T-lock
- Gerda Lock
- Mortice Lock
- FB1 or FB2 or FB4 Lock

Finishes :

- Painted - BS or RAL colour

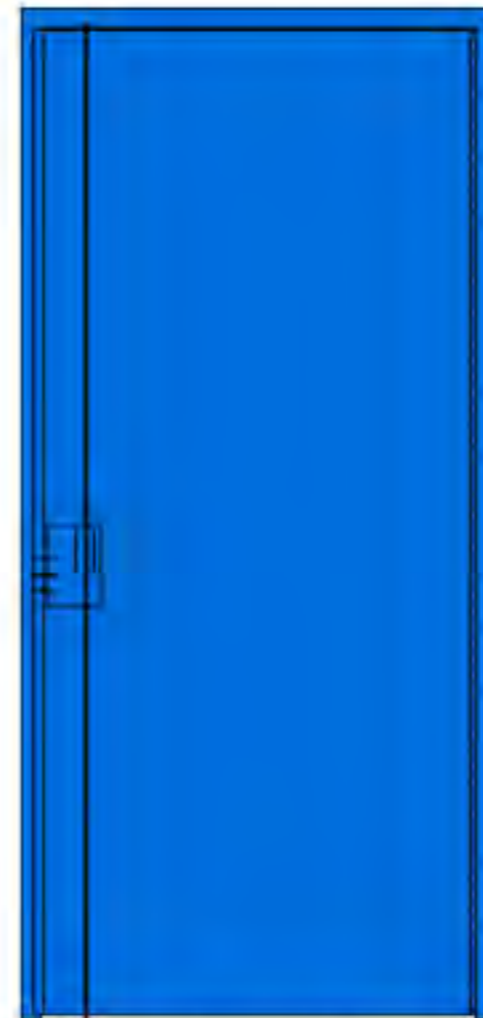

MIL-141




MIL-142



MIL-143



MIL-144

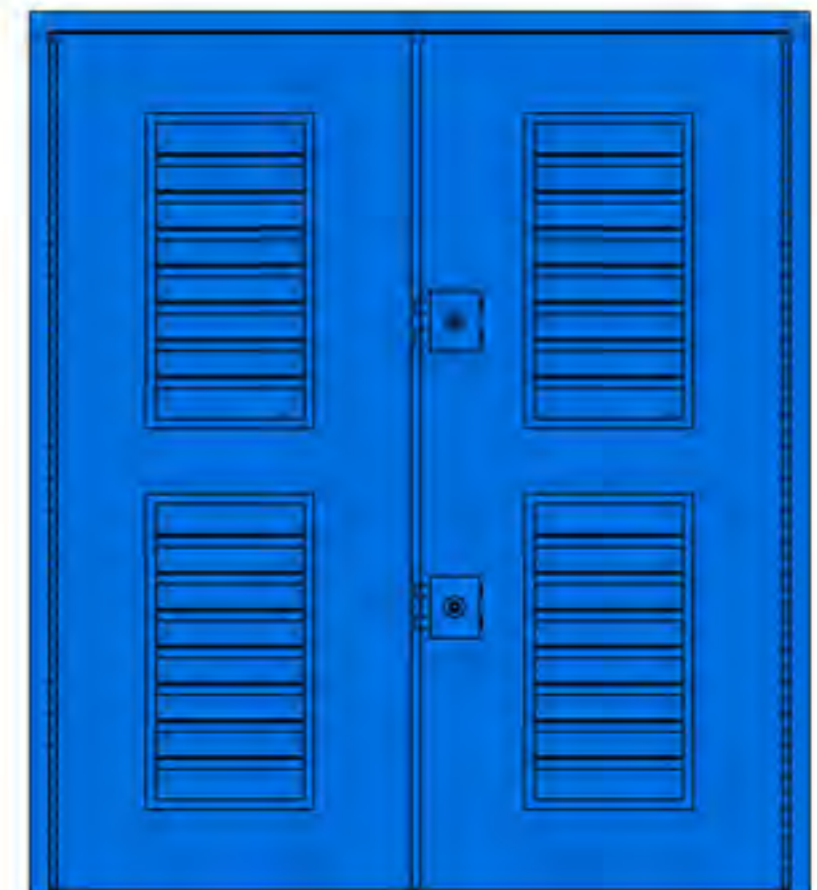

MIL-145

